


SECTION THROUGH CENTERLINE OF MAIN POSTS

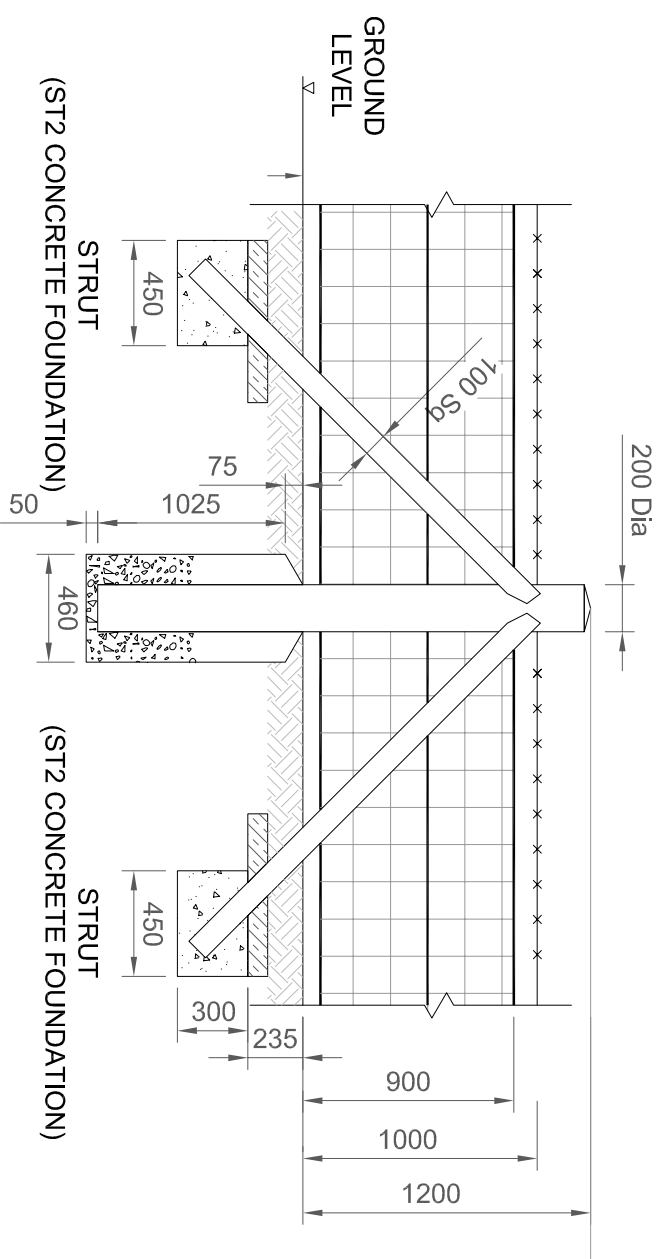

- STRUTTING POSTS - (200 Ø min x 2300mm Long)
To be provided at all ends, acute corners and at intervals not greater than 150m on straight sections.
- TURNING/CONTOUR POSTS - (200 Ø min x 2300mm Long)
To be provided at obtuse corners and at acute ground undulations.
- INTERMEDIATE POSTS - (75 x 75 min X 2020mm Long)
To be provided at 1.8m centres max and at acute variations in level.

TIMBER POST AND WIRE MESH STOCK PROOF Type F6

NOTES

1. All dimensions are in millimetres.
2. All posts and struts to be sawn timber.
3. BS 1722 Part 2 applies unless otherwise stated.
4. Galvanised high tensile stock fence HT8-80-15 Wire mesh to comply with BS 1722-2:2006
5. Details of posts and connections shall be in accordance with Drawing Nos. M8MFJV/AW/003 F3 and 004 F4.
6. The wire shall be fixed on the field side of the fence unless otherwise stated.
7. Posts can be supported by rammed backfill or concrete ST2 as required.
8. Where plain or barbed wire is required it shall be comply with BS EN 10223-4.

CLIENT



The Scottish Government

PROJECT TITLE

M8 M73 M74
Motorway Improvements

REV

REVISIONS

AMENDMENTS

BY

CHKD

APPD

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

This map is based upon Ordnance Survey material with the permission of Ordnance Survey on behalf of the Controller of the King's Stationery Office (C) Crown Copyright and Database Right (2011). All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means electronic, mechanical, photocopying, recording or otherwise without the prior written permission of Ordnance Survey. Ordnance Survey is a registered trademark of Ordnance Survey Limited.

ENGINEER

mouchel FAIRHURST

IN ASSOCIATION WITH

SIAS amec

DRAWING TITLE

Accommodation Works
Timber Post and Wire Mesh Type F6

SCALE @ A3

DRAWING NO

M8MFJV/AW/006

REV

—