

To be provided at obtuse corners and at acute ground undulations.

STRAINING POSTS - (200 Ø min x 2300mm Long)

To be provided at all ends, acute corners and at intervals not greater than 150m on straight sections.

STRUT
(ST2 CONCRETE FOUNDATION)

5

460

(ST2 CONCRETE FOUNDATION)

450

300

450

75

1025

TURNING/CONTOUR POSTS - (200 Ø min x 2300mm Long)

INTERMEDIATE POSTS - (75 x 75mm min X 2020mm Long)


The Scottish Government

Motorway Improvements

M8 M73 M74

To be provided at 1.8m centres max and at acute variations in level.

TIMBER POST AND WIRE MESH COMBINED BADGER AND OTTER PROOF MAMMAL FENCE TYPE STRAINING POST (ST2 CONCRETE FOUNDATION)

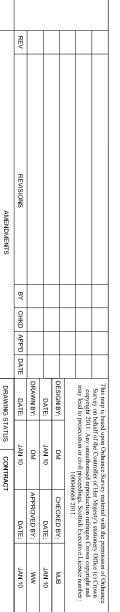

- 5. Details of posts and connections
- 6. The wire shall be fixed on the field side shall be in accordance with Drawing Nos. M8MFJV/AW/003 F3 and 004 F4.
- of the fence unless otherwise stated.
- concrete ST2 as required. Posts can be supported by rammed backfill or

Fencing to be checked on completion by fencing system is achieved. competent person to ensure a mammal proof

mouchel

SING

amec

IN ASSOCIATION WITH

Accommodation Works
Timber Post and Wire Mesh Badger and

SCALE @ A3 Otter Proof Mammal Type F7 M8MFJV/AW/007