


STRAINING POSTS -
(125 x 125 min x 3390mm Long)
To be provided at all ends, acute corners and at intervals not greater than 69m on straight sections.

TURNING/CONTOUR POSTS -
(125 x 125 min x 3390mm Long)
To be provided at obtuse corners and at acute ground undulations.

INTERMEDIATE POSTS -
(125 x 125 min x 3390mm Long)
To be provided at intervals of not more than 3m, measured centre to centre.

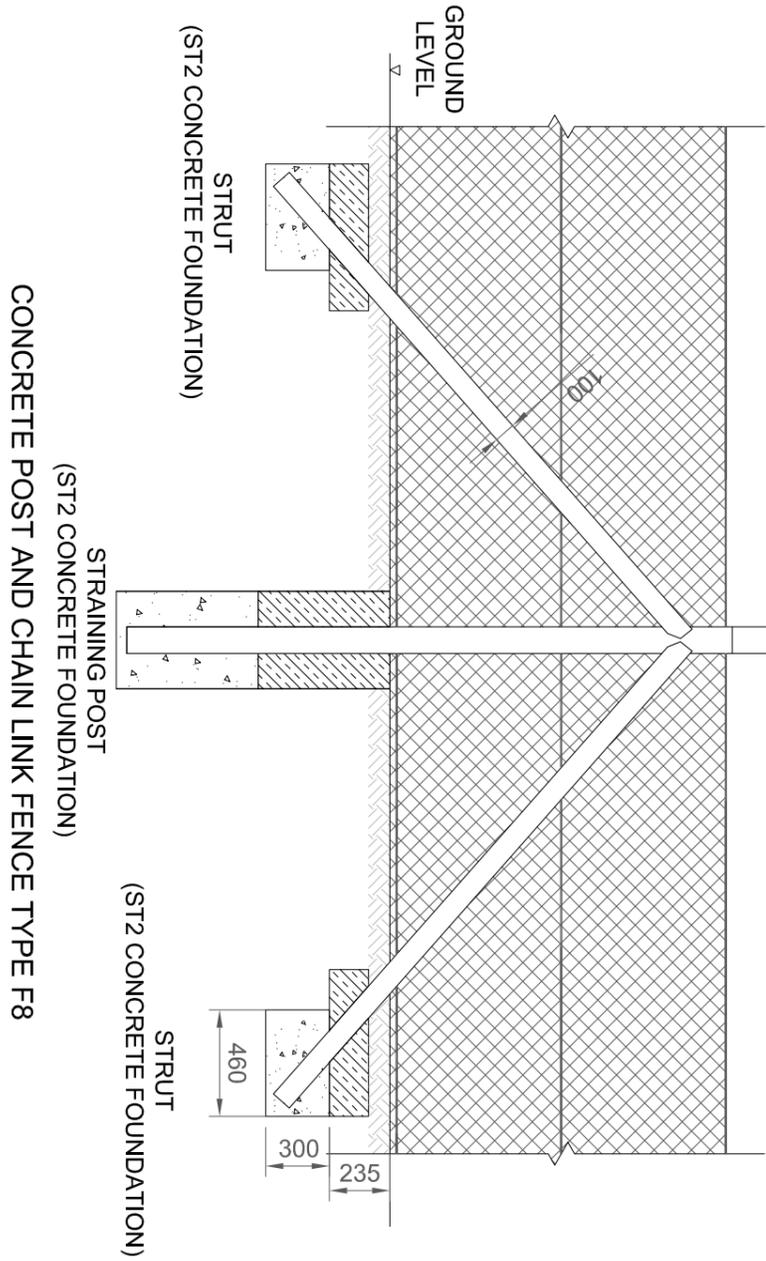

CONCRETE POST AND CHAIN LINK FENCE TYPE F8

NOTES

1. All dimensions are in millimetres.
2. BS 1722 Part 1 applies unless otherwise stated.
3. Concrete posts and struts shall be steel reinforced concrete conforming to BS EN 12839
4. The wire shall be fixed on the field side of the fence unless otherwise stated.
5. Chain link mesh shall be zinc or zinc alloy coated wire conforming to BS EN 10223-6.



PROJECT TITLE
**M8 M73 M74
Motorway Improvements**

REV	REVISIONS	BY	CHKD	APPD	DATE

DESIGN BY:	DM	CHECKED BY:	MLB
DATE:	JAN 10	DATE:	JAN 10
DRAWN BY:	DM	APPROVED BY:	WW
DATE:	JAN 10	DATE:	JAN 10



DRAWING TITLE
**Accommodation Works
Concrete Post and Chain Link Fence
Type F8**

SCALE @ A3
DRAWING NO
M8MFJV/AW/008