



SECTION THROUGH CENTERLINE OF MAIN POSTS



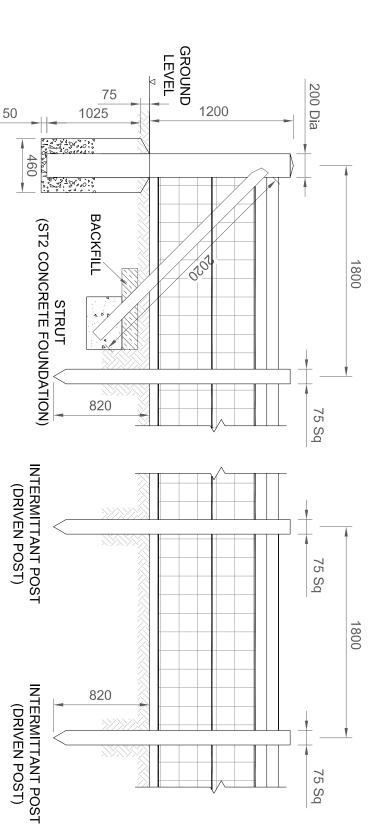

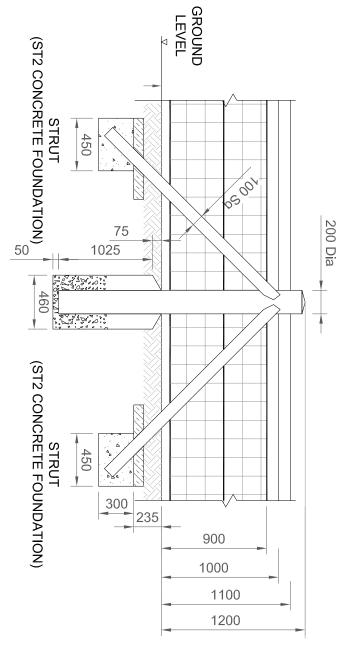

NOTES

ယ

BS 1722 Part 2 applies unless otherwise stated.

2. All posts and struts to be sawn timber.

1. All dimensions are in millimetres.

STRAINING POST (ST2 CONCRETE FOUNDATION)

7. Posts can be supported by rammed backfill or

concrete ST2 as required.

6. The wire shall be fixed on the field side

of the fence unless otherwise stated.

Details of posts and connections

shall be in accordance with Drawing

Nos. M8MFJV/AW/003 F3 and 004 F4.

4. Galvanised high tensile stock fence HT8-80-15

Wire mesh to comply with BS 1722-2:2006

TIMBER POST AND WIRE MESH STOCK PROOF Type F26

 $\begin{array}{l} \text{INTERMEDIATE POSTS -} \\ \text{(75 x 75 min X 2020mm Long)} \end{array}$

To be provided at 1.8m centres max and at acute variations in level.

The Scottish Government

Motorway Improvements M8 M73 M74 TURNING/CONTOUR POSTS - (200 Ø min x 2300mm Long)

To be provided at obtuse corners and at acute ground undulations.

To be provided at all ends, acute corners and at intervals not greater than 150m on straight sections.

STRAINING POSTS - (200 Ø min x 2300mm Long)

		DRAWING STATUS CONTRACT	SUTATUS	DRAWING					AMENDMENTS
JAN 10	DATE:	JAN 10		DATE:	DATE	APP'D	BY CHKD APP'D DATE	ВҮ	SIONS
ww	APPROVED BY:	DM		DRAWN BY:					
JAN 10	DATE:	JAN 10		DATE					
MJB	CHECKED BY:	DM		DESIGN BY:					
	100046668 2011.	10004							
tive Licence number:	may lead to prosecution or civil proceedings. Scottish Executive Licence number:	n or civil procee	o prosecutio	may lead to					

mouchel IN ASSOCIATION WITH ARHURSI

Accommodation Works
Timber Post and Wire Mesh Type F26

SING amec

SCALE @ A3 NTS M8MFJV/AW/026