



**TRANSPORT
SCOTLAND**
CÒMHDHAIL ALBA

Environmental Impact Assessment Record of Determination

M74 Jct 11-12 SB

Contents

Project Details	3
Description.....	3
Location	4
Description of local environment.....	5
Air quality	5
Cultural heritage	5
Landscape and visual effects	5
Biodiversity	6
Field Survey	6
Geology and soils	6
Material assets and waste	7
Key Materials Required for Activities.....	7
Key Waste Arising from Activities.....	7
Noise and vibration	8
Population and human health	8
Road drainage and the water environment.....	8
Climate	9
Carbon Goals	9
Monitoring, Management and Opportunities	10
Description of main environmental impacts and proposed mitigation	11
Air quality	11
Biodiversity	11
Material assets and waste	12
Noise and vibration	13
Population and human health	14
Road drainage and the water environment.....	14
Climate	15
Vulnerability of the project to risks	16
Assessment of cumulative effects.....	16
Assessments of the environmental effects	17
Statement of case in support of a Determination that a statutory EIA is not required.....	17
Annex A.....	19

Project Details

Description

Works are required to maintain the safety and integrity of an approx. 2.2km stretch of the southbound M74 carriageway between junction 11-12, as the existing surface course has reached the end of its serviceable life.

Works will involve carriageway resurfacing utilising TS2010 surface course to varying depths dependent on condition, ranging from 40mm to 100mm depths across the length of the scheme.

The proposed construction activities are likely to involve the following:

- Milling of existing bituminous material by road planer;
- Hand-held jackhammer and compressor for breaking up surfaces not accessible by planer;
- Loader/excavator used to collect and move excess material;
- Base/binder material laid and compressed (where required);
- New bituminous material laid by a paver;
- Material compacted using a heavy roller;
- Mechanical sweeper to collect loose material;
- HGV for removal and replacement of material; and
- Road markings replaced using an extrusion tool.

The total area of the works is approximately 17,010m² (1.7ha) across the southbound (SB) lane.

The works are programmed for November 2022. Duration and timings are yet to be determined, however working hours are likely to be overnight.


Traffic management (TM) is expected to consist of overnight lane closures. The M74 carriageway will remain open throughout the works.

Location

The works are located on the M74 motorway between junction 11-12 of the Southbound carriageway, within the rural setting of South Lanarkshire. The scheme has the following National Grid References (NGR):

- Scheme start: NS 84676 34709
- Scheme end: NS 85752 32819

Figure 1: Scheme Location

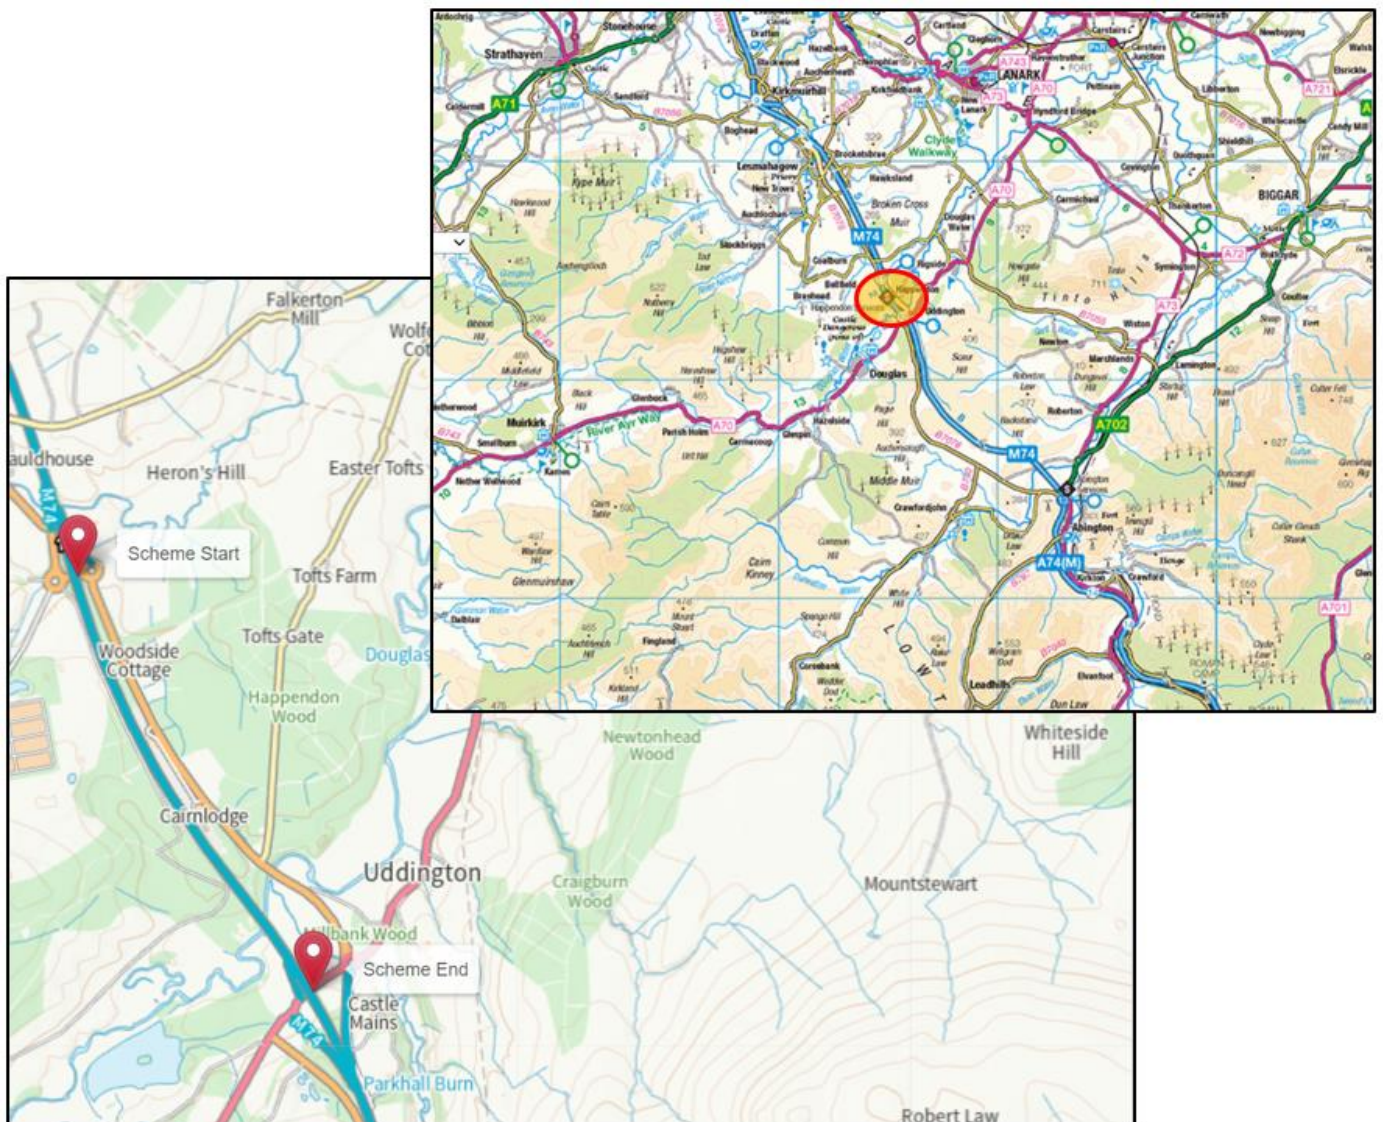

Description of local environment

Air quality

The works are located in a rural setting within South Lanarkshire, surrounded mostly by areas of agriculture, small areas of woodland, small areas of residential, commercial and industrial property. There are a small number of residential properties within proximity to the works location, with the closest properties being Castle Mains located approximately 270m Southeast of the Southern scheme extent and Thorniehall Farm located approximately 210m Northeast of the Northern Scheme extent.

[Average Annual Daily Flow](#) (AADF) in 2020 for the M74 carriageway within the scheme extent accounted for 22,582 vehicles, with an average of 27% heavy goods vehicles (HGV).

The scheme location does not fall within any [Air Quality Management Areas](#) (AQMAs) declared by South Lanarkshire council.

Cultural heritage

A desktop study using [PastMap](#) has not identified any areas/features of cultural heritage within 300m of the scheme extents.

All works will be located within the existing carriageway boundary and will not impact any areas of land that have not previously been subjected to engineering activity.

It has been determined that the proposed project does not carry the potential to cause direct or indirect impact to cultural heritage.

As such, impact has been assessed as being 'no change' and has been scoped out of requiring further assessment.

Landscape and visual effects

A desktop study using [NatureScot Sitelink](#) and [PastMap](#) online interactive map has not highlighted any areas designated for landscape character within 300m of the works.

Historic Environment Scotland's [HLAMap](#) has highlighted the surrounding landscape to consist of a combination of fields, farmland, and managed woodland.

Works will be restricted to the existing carriageway boundary and will not impact upon the surrounding landscape. Views of, and from, the road will be temporarily affected during construction due to the presence of works, traffic management and plant. As the works are operating on a like-for-like basis, no permanent changes to landscape features are predicted.

As such, impact to local landscape has been assessed as being 'no change' and has been scoped out of requiring further assessment.

Biodiversity

The works are located in a rural setting within South Lanarkshire, surrounded mostly by areas of agriculture, small areas of woodland, small areas of residential, commercial and industrial property.

A desktop study using [NatureScot's Sitelink online interactive map](#) has identified Coalburn Moss Special Area of Conservation (SAC), approximately 1.8km northwest from the northern scheme extent. This site has been designated for presence of active raised bogs, with the site containing one of the larger tracts of vigorous bog-moss-dominated vegetation in the Central Belt of Scotland, with distinctive wet *Sphagnum* hollows.

Amey's Invasive Non-native Species (INNS) Database has not identified any invasive plant species within the scheme extents.

Field Survey

A site survey was undertaken on the woodland located adjacent to the M74 carriageway on the 10th of August 2022.

The woodland consisted of a mix of deciduous and coniferous trees on relatively flat ground. Some signs of activity were identified, however no definitive signs of protected species presence were identified.

Geology and soils

The [National Soil Map of Scotland](#) has identified the local soil type as brown soils.

A desktop study using the [British Geological Survey Map](#) identifies the local geology type as the following:

- Bedrock Geology: Passage Formation - Sedimentary rock cycles, clackmannan group type. Sedimentary bedrock formed between 328 and 318 million years ago during the Carboniferous period.
- Superficial Deposits: Glaciofluvial Sheet Deposits - Gravel, sand and silt. Sedimentary superficial deposit formed between 2.588 million years ago and the present during the Quaternary period.

As a result of the works taking place strictly within the existing man-made footprint, it has been determined that the proposed project does not carry the potential to cause direct or indirect impact to geology or soils. As such, impact has been assessed as being 'no change' and has been scoped out of requiring further assessment.

Material assets and waste

Key Materials Required for Activities

The following materials will be required for the works:

- TS2010 surface course
- AC32 base
- AC20 binder
- Bitumen
- Road paint
- Road studs

A proportion of reclaimed asphalt pavement (RAP) is used in asphalt production. Typical RAP values for base and binder are 10% -15% with up to 10% in surface course.

TS2010 Surface Course allows a wider array of aggregate sources to be considered when compared to typical SMA. As a result the use of TS2010 will reduce the usage of imported aggregates, and increase the use of a wider range of sustainable aggregate sources.

Key Waste Arising from Activities

Road planings, studs and kerbs will be produced as waste from the works.

On-site investigations did not highlight presence of any tar-containing material within any cores taken from within the scheme extents. As such, all road planings generated as a result of the works will be recovered in accordance with the criteria stipulated within SEPA document 'Guidance on the Production of Fully Recoverable Asphalt Road Planings'.

Noise and vibration

The works are located in a rural setting within South Lanarkshire, surrounded mostly by areas of agriculture, small areas of woodland, small areas of residential, commercial and industrial property.

The Annual Average Daily Flow (AADF) in 2020 for the main M74 carriageway within the scheme extents accounted for 22,582 vehicles, with an average of 27% heavy goods vehicle (HGV). Baseline noise conditions at this location are likely influenced primarily by traffic travelling along the M74, and additionally by noise associated with nearby land uses.

Cairn Lodge Services are located approximately 40m east of the southbound carriageway.

There are a small number of residential properties within proximity to the works location, with the closest properties being Castle Mains located approximately 270m southeast of the southern scheme extent and Thorniehall Farm located approximately 210m northeast of the northern scheme extent.

The works do not fall within a [Candidate Noise Management Area](#) (CNMA) as defined by the Transportation Noise Action Plan, Road Maps.

Population and human health

The M74 is a key route through South Lanarkshire, connecting Glasgow and Gretna and providing further access south via the M6.

A number of core paths exist within proximity to the scheme but are not part of the M74 carriageway.

National cycle route 74 runs adjacent to the M74 carriageway for the full scheme extent.

The off slip for junction 11 and on slip for junction 12 are within the scheme extent.

Road drainage and the water environment

A desktop study using the Scottish Environment Protection Agency (SEPA) [River Basin Management Plan Interactive Map](#) has identified Douglas Water (SEPA ID: 10094), which flows under the M74 carriageway located approximately 230m northwest from the southern scheme extent. SEPA has classified this waterbody as having an overall status of 'Good'.

Poniel Water, a river (ID: 10097) also flows beneath the M74 carriageway approximately 330m north of the northern scheme extent. SEPA has classified this waterbody as having an overall status of 'Moderate'.

The [Indicative River & Coastal Flood Map](#) by SEPA has highlighted some small areas at medium risk of surface water flooding on the carriageway within the scheme extents, primarily at junction 11 on the main M74 carriageway. Each year this area has a 0.5% chance of flooding.

The drainage for the scheme consists of top entry gullies and filter drains.

Climate

Carbon Goals

The Climate Change (Scotland) Act sets out the target and vision set by the Scottish Government for tackling and responding to climate change. The Act includes a target of reducing CO2 emissions by 80% before 2050 (from the baseline year 1990).

The Scottish Government has since published its indicative Nationally Determined Contribution (NDC) to set out how it will instead reach net-zero by 2045, working to reduce emissions of all major greenhouse gases (GHG) by at least 75% by 2030. By 2040, the Scottish Government is committed to reduce emissions by 90%, with the aim of reaching net-zero by 2045 at the latest.

Transport Scotland is committed to reducing carbon across Scotland's transport network, this commitment is being enacted through the Mission Zero for Transport. Transport is the largest contributor to harmful climate emissions in Scotland. In response to the climate emergency, TS are committed to reducing their emissions by 75% by 2030 and to a legally binding target of net-zero by 2045.

Amey's Company Wide Carbon Goal is to achieve Scope 1 and 2 net-zero carbon emissions, with a minimum of 80% absolute reduction on our emissions by 2035. Amey is aiming to be fully net-zero, including Scope 3 emissions, by 2040.

Amey is working towards a contractual commitment to have carbon neutral depots on the SW NMC network by 2028. Amey have set carbon goals for the SW NMC contract as a whole to be net-zero carbon by 2032.

Monitoring, Management and Opportunities

To support our journey towards carbon neutral and zero waste we include potential opportunities for enhancement utilising circular economy principals within assessment of material assets.

Amey (working on behalf of Transport Scotland) undertake carbon monitoring. Emissions from our activities are recorded using Transport Scotland's Carbon Management System.

Further information identifying how Amey will obtain the above Carbon Goals can be viewed within the Carbon Management and Sustainability Plan Roadmap to net-zero: STRNMC – South West.

Description of main environmental impacts and proposed mitigation

Air quality

Impacts

- The use of vehicles, plant and generators emitting carbon emissions may temporarily affect air quality and will require the use of finite resources.
- On site construction activities carry the potential to produce airborne particulate matter and generate emissions that may have a slight adverse impact on local air quality levels.

Mitigation

- All works shall operate in accordance with current best practice as outlined in the Guidance on the assessment of dust from demolition and construction (2014) published by the IAQM, which includes the following mitigation relevant to this scheme:
 - When not in use plant and vehicles will be switched off; there will be no idling vehicles.
 - All plant and fuel-requiring equipment utilised during construction shall be well maintained in order to minimise emissions, as per manufacturing and legal requirements.
- Green driving techniques will be adopted, and effective route preparation and planning shall be undertaken prior to works.
- Planing operations will be wetted to reduce dust arising.
- Drop heights to haulage vehicles and onto conveyors will be minimised.
- Lorries will be sheeted when carrying dry materials.
- Surfaces will be swept where loose material remains following planing.

Providing all works operate in accordance with current best practice, the residual impact for air is considered no change.

It has been determined that the proposed project will not have direct or indirect significant effects to local air quality

Biodiversity

- Protected species may be active within the local area and may be subject to a minor degree of light/noise disturbance from the works.

- No carriageway lighting is present throughout the scheme extents. The addition of any temporary lighting for the works may affect the foraging or commuting routes of nocturnal protected species which may be active in the surrounding area.
- Due to sufficient distancing between the works and Coalburn Moss Special Area of Conservation (SAC), in addition to lack of ecological connectivity, it has been assessed that the proposed scheme does not carry the potential to cause Likely Significant Effects (LSE).

Mitigation

- Operatives will remain vigilant for the presence of protected species within or near the works. If an animal is spotted, all works shall temporarily halt until the animal has moved on, and any sightings shall be reported to the E&S Team.
- On site light sources will be kept to a minimum, and only used as required:
 - When in use, any artificial site lighting will be kept directional to the works area as far as reasonably practicable, reducing any light spill into the wider surroundings, and potentially sensitive habitat (e.g. woodland).
 - When not in use or required, light sources shall be switched off to reduce impact on nocturnal species.
- Effects from noise will be kept to a minimum through the use of appropriate mufflers and silencers fitted to machinery. All exhaust silencers shall be checked at regular intervals to ensure efficiency.
- See additional mitigation measures in *Noise and Vibration* and *Road drainage and the water environment*.

On the condition that best practice is adhered to, residual impact to local biodiversity is considered no change as a result of the works.

It has been determined that the proposed project will not have direct or indirect significant effects to biodiversity.

Material assets and waste

Impacts

- The design life for the TS2010 surfacing proposed is estimated to be 20 years. This will reduce the requirement for maintenance to this section of road over the period.
- The works will result in contribution to resource depletion through use of virgin materials.
- Greenhouse gas (GHG) emissions will be generated by material production and transporting to and from site.
- Transportation and recovery of materials/waste will require energy deriving from fossil fuel, a non-renewable source.

Mitigation

- Materials will be derived from recycled, secondary or re-used origin as far as practicable within the design specifications to reduce natural resource depletion and associated emissions.
- Road planings generated will be recovered by a licenced contractor for reuse and/or recycling in accordance with the criteria stipulated within SEPA document 'Guidance on the Production of Fully Recoverable Asphalt Road Planings'.

Temporary impact during construction is considered negligible adverse, with residual impact considered no change.

It has been determined that the proposed project will not have direct or indirect significant effects to the consumption of material assets or creation of waste

Noise and vibration

Impacts

- TS2010 road surfacing will be utilised, which should reduce mid to high frequencies of traffic noise levels. Nearby receptors may benefit from improved reduced noise as a result of the scheme.
- Works will be undertaken during night-time programming. As such, residential and sensitive properties in proximity may experience a level of disturbance due to an increase in baseline noise levels, including potential disruption to sleep.

Mitigation

- South Lanarkshire Council's Environmental Health Department will be notified in advance of the works by the E&S Team, due to night-time programming.
 - This will be undertaken during weekly notification issue to all Local Authorities for the upcoming Amey programme of works.
- Residential properties in proximity will be notified in advance of the works, providing details of timings, nature, and duration of the works.
- Effects from noise shall be kept to a minimum through the use of appropriate mufflers and silencers fitted to machinery. All exhaust silencers will be checked at regular intervals to ensure efficiency.
- Plant and machinery will be switched off when not in use to reduce noise disruptions to the surrounding environment.
- Engine exhaust and vent silencers shall be used where possible.
- The noisiest works will be scheduled for before 11:00pm where feasible.
- The delivery of materials to the scheme extents shall be made during daytime and early evening hours where reasonably practicable, to reduce delivery trips required and noise associated by traffic.

- Operatives will avoid extraneous noise whilst onsite and will be briefed using the Amey Noise and Vibration environmental briefing.

Provided that best practice measures are followed, it is predicted that residual impact from noise will be negligible beneficial, with temporary minor adverse impact predicted during construction.

It has been determined that the proposed project will not have direct or indirect significant effects to local noise and vibration.

Population and human health

Impacts

- TM is expected to consist of single lane closures of the M74 carriageway. The M74 carriageway will remain open throughout the works.
 - Use of a lower speed limit through this section of carriageway may cause minor delays to road users of the M74 carriageway.
- TS2010 road surfacing will be utilised. TS2010 can improve the skid resistance of the road.
- The use of TS2010 is shown to have superior durability to standard road mixes as such this will extend the life span of the carriageway preventing the need for reoccurring routine maintenance and associated levels of disruption.

Mitigation

- Advance traffic signs will be placed prior to works in an effort to minimise disturbance to vehicular travellers, and will inform road users of expected duration, timings, and any temporary traffic management arrangements/restrictions.

Provided that best practice measures are followed, it is predicted that residual impact to population and human health will be no change, with temporary minor adverse impact predicted during construction.

It has been determined that the proposed project will not have direct or indirect significant effects to local population and human health.

Road drainage and the water environment

- Potential for spills, leaks or seepage of fuels and oils associated with plant to escape and reach drainage systems and watercourses if not controlled, which may affect the water environment if not effectively controlled.

- If not appropriately controlled, debris, sediment and run off from the works has the potential to enter nearby drains and watercourses and could detrimentally impact water quality.
- In the event of a flooding incident, debris may be mobilised and could enter the road drainage having a detrimental effect on the surrounding local water environment.
- Areas of the M74 carriageway are at risk of surface water flooding within the scheme extents.

Mitigation

- Best practice, as detailed by SEPA Guidance for Pollution Prevention (GPPs), will always be followed onsite. This will ensure that any potential sediments/spills are not allowed to enter road drainage unchecked.
- Appropriate measures shall be implemented onsite to prevent any potential pollution to the natural water environment (e.g. debris, dust and hazardous substances). This will include, but will not be limited to, spill kits being present onsite at all times, and the use of funnels and drip trays when transferring fuel, and utilisation of drain covers/shielding boards.
- Any pollution incidences will be reported to the Amey control room.
- Operatives will conduct regular checks of the surrounding ground/drains for any spillages/leakage regularly, especially in periods of heavy wind and rainfall.
- All debris which has the potential to be suspended in surface water and wash into the local water environment shall be cleaned from the site following the works.
- Weather reports shall be monitored prior to and during all construction activities. In the event of adverse weather/flooding events, all activities will temporarily stop, and only reconvene when deemed safe to do so, and when run-off/drainage can be adequately controlled to prevent pollution.

Providing all works operate in accordance with site control measures and SEPA Guidance for Pollution Prevention (GPP) the residual impact for water is considered no change.

It has been determined that the proposed project will not have direct or indirect significant effects to the water environment.

Climate

Impacts

- GHG emissions will be emitted through the use of machinery, vehicles and materials used (containing recycled and virgin materials) and transporting to and from site.

Mitigation

- Local suppliers will be used as far as reasonably practicable to reduce travel time and GHG emitted as part of the works.
- Vehicles/plant shall not be left on when not in use to minimise and prevent unnecessary emissions being emitted.
- Further actions and considerations for this scheme are detailed in the above Material assets and waste section.

It has been determined that the proposed project will not have direct or indirect significant effects to climate.

Vulnerability of the project to risks

As the works will be limited to the like-for-like replacement of the carriageway structure, there will be no change in vulnerability of the road to risk, or in severity of major accidents/disasters that would impact on the environment.

It has been determined that the proposed project is not expected to alter the vulnerability of the existing trunk road infrastructure to risk of major accidents or disasters.

Assessment of cumulative effects

The [Scottish Road Workers Commission](#) Interactive Map does not highlight any other works in the area at the time of construction.

[South Lanarkshire Council's Planning Alert Portal](#) does not highlight any proposed developments or planning applications on the M74 carriageway within proximity to the scheme.

Amey's current [programme of works](#) has not highlighted any other works in the area at the time of construction.

No other nearby schemes which may result in a combined effect on nearby receptors have been identified.

Any future schemes will be programmed to take into account already programmed works, and as such any effect (such as from TM arrangements and potential construction noise) will be limited.

Assessments of the environmental effects

Following assessment as detailed within this Record of Determination, and provided that mitigation measures are in place and best practice is followed, the residual impact is deemed neutral and there will be no significant effects on the environment.

The following environmental surveys/reviews have been undertaken:

- A design Initial Environmental Review of the scheme, undertaken by the Environment and Sustainability Team at Amey in September 2022.

Statement of case in support of a Determination that a statutory EIA is not required

This is a relevant project in terms of section 55A(16) of the Roads (Scotland) Act 1984 as it is a project for the improvement of a road and the completed works (together with any area occupied by apparatus, equipment, machinery, materials, plant, spoil heaps, or other such facilities or stores required during the period of construction) exceed 1 hectare in area.

The project has been subject to screening using the Annex III criteria to determine whether a formal Environmental Impact Assessment is required under the Roads (Scotland) Act 1984 (as amended by The Roads (Scotland) Act 1984 (Environmental Impact Assessment) Regulations 2017). Screening using Annex III criteria, reference to consultations undertaken and review of available information has not identified the need for a statutory EIA.

The project will not have significant effects on the environment by virtue of factors such as:

Characteristics of the scheme:

- Construction activities are restricted to the approximate 17,010m² (1.7ha) of existing carriageway.
- At end of life, components can be recycled, reducing waste to landfill.
- Any uncontaminated road planings will be recycled in accordance with Guidance on the Production for Fully Recovered Asphalt Road Planings.
- Materials will be derived from recycled, secondary or re-used origin as far as practicable within the design specifications.
- The chosen material TS2010 Surface Course allows a wider array of aggregate sources to be considered when compared to typical SMA.

- The design option conveys sustainability benefits by significantly reducing the quantity of maintenance interventions required at the location.

Location of the scheme:

- The scheme will be confined within the existing carriageway boundaries and as a result will not require any land take and will not alter any local land uses.
- The scheme is not situated in whole or in part in a “sensitive area” as listed under regulation 2 (1) of the Environmental Impact Assessment (Scotland) Regulations 1999 (as amended).

Characteristics of potential impacts of the scheme:

- As the works will be limited to the like-for-like replacement of the structural components, there is no change to the vulnerability of the road to the risk or severity of major accidents/disasters that would impact on the environment.
- Protected species may be active within the local area and may be subject to a minor degree of light/noise disturbance from the works. No presence of shelter were identified in proximity, and as such no authorisation is required to permit the works. Works will operate under best practice and the additional measures outlined in the *Biodiversity* section above, ensuring that disturbance is limited.
- Due to sufficient distancing between the works and Coalburn Moss Special Area of Conservation (SAC), in addition to lack of ecological connectivity, it has been assessed that the proposed scheme does not carry the potential to cause Likely Significant Effects (LSE).
- The successful completion of the scheme will afford benefits to residential properties in proximity, due to improved condition and ride quality of the carriageway surface.
- The use of TS2010 road surfacing affords the benefits of a reduction in mid to high frequencies of traffic noise and a reduction in ground vibrations. As a result, ambient noise levels should decrease post construction.

Annex A

“sensitive area” means any of the following:

- land notified under sections 3(1) or 5(1) (sites of special scientific interest) of the Nature Conservation (Scotland) Act 2004
- land in respect of which an order has been made under section 23 (nature conservation orders) of the Nature Conservation (Scotland) Act 2004
- a European site within the meaning of regulation 10 of the Conservation (Natural Habitats, &c.) Regulations 1994
- a property appearing in the World Heritage List kept under article 11(2) of the 1972 UNESCO Convention for the Protection of the World Cultural and Natural Heritage
- a scheduled monument within the meaning of the Ancient Monuments and Archaeological Areas Act 1979
- a National Scenic Area as designated by a direction made by the Scottish Ministers under section 263A of the Town and Country Planning (Scotland) Act 1997
- an area designated as a National Park by a designation order made by the Scottish Ministers under section 6(1) of the National Parks (Scotland) Act 2000.



**TRANSPORT
SCOTLAND**

CÒMHDHAIL ALBA

© Crown copyright 2022

You may re-use this information (excluding logos and images) free of charge in any format or medium, under the terms of the Open Government Licence. To view this licence, visit <http://www.nationalarchives.gov.uk/doc/open-government-licence> or e-mail: psi@nationalarchives.gsi.gov.uk

Where we have identified any third party copyright information you will need to obtain permission from the copyright holders concerned.

Further copies of this document are available, on request, in audio and visual formats and in community languages. Any enquiries regarding this document / publication should be sent to us at info@transport.gov.scot

This document is also available on the Transport Scotland website: www.transport.gov.scot

Published by Transport Scotland, October 2022

Follow us:



transport.gov.scot



**Scottish Government
Riaghaltas na h-Alba
gov.scot**