



TRANSPORT
SCOTLAND
CÒMHDHAIL ALBA

Environmental Impact Assessment Record of Determination

A82 Stob Dearg Viewpoint -
Resurfacing

Contents

Project Details	3
Description.....	3
Location	3
Description of local environment.....	5
Air quality	5
Cultural heritage	5
Landscape and visual effects	5
Biodiversity	6
Geology and soils	7
Material assets and waste	8
Noise and vibration	8
Population and human health	8
Road drainage and the water environment.....	9
Climate	9
Policies and plans	10
Description of main environmental impacts and proposed mitigation	11
Air quality	11
Cultural heritage	12
Landscape and visual effects	12
Biodiversity	13
Material assets and waste	15
Noise and vibration	16
Population and human health	17
Road drainage and the water environment.....	17
Climate	19
Vulnerability of the project to risks	19
Assessment cumulative effects.....	20
Assessments of the environmental effects	21
Statement of case in support of a Determination that a statutory EIA is not required.....	21
Annex A.....	23

Project Details

Description

BEAR Scotland has been commissioned by Transport Scotland to carry out resurfacing works on a stretch of the A82 carriageway at Stob Dearg Viewpoint within the Highlands. The works include milling out and replacing bituminous material to a depth of 100mm. Following the resurfacing works, road markings will be reinstated.

The total length of the scheme is 1,100m with an approximate area of 0.67 ha.

The main plant will include pavers, planers, excavators, and rollers. A welfare unit with generator will be required on site, and heavy goods vehicles (HGVs) will be required for transport of materials and wastes.

The resurfacing procedure is as follows:

- Set up traffic management (TM) and mark out site.
- Mill out old surface course.
- Reset and/or replace roadside gullies where required.
- Lay new surface course.
- Roll surface and allow it to set.
- Install road markings and studs.
- Remove TM and open road.

The works are programmed to be completed within the 2024/2025 financial year, currently commencing in November 2024. Works will be undertaken during night-time hours (19:00-07:00) over the duration of eight nights. Changes in the programme may result in the need for a change to daytime working.

TM will involve a full road closure with timed amnesties. A diversion via the A85/A828 will also be in place. Site access and plant storage will be located within TM. If the programme changes, this may result in amendments to the exact TM requirements.

Location

The scheme is located on the A82 carriageway, north of Bridge of Orchy within the Highlands (Figure 1).

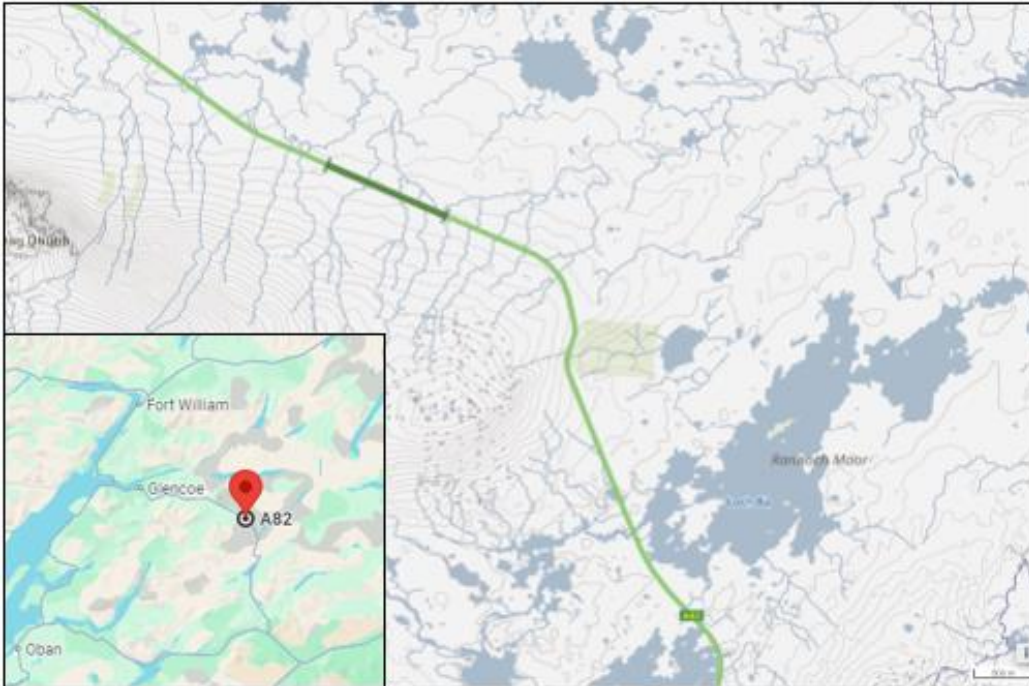


Figure 1: The scheme extent (dark green section). Inset map shows the scheme location in the wider area.

The scheme has the following National Grid References (NGRs):

- Scheme western point: [NN 28331 52700](#)
- Scheme eastern point: [NN 29333 52251](#)

Description of local environment

Air quality

No Air Quality Management Areas (AQMA) are located within 60km of the proposed works ([Air Quality in Scotland](#)).

No Air Quality Monitoring Stations (AQMS) are located within 60km of the proposed works ([Air quality in Scotland](#)).

No Scottish Pollutant Release Inventory (SPRI) sites (which record air pollutant releases), are located within 20km of the scheme ([Scotland's Environment](#)).

Baseline air quality is likely influenced by traffic along the trunk road and day-to-day agricultural and/or urban activities.

The A82, within the scheme extents is a single carriageway with the national speed limit applying. The Annual Average Daily Traffic (AADT) flow was recorded as 6,540 motor vehicles in 2023, of which 2.5% was heavy goods vehicles (ID: 30768) ([Road Traffic Statistics](#)).

Cultural heritage

No Listed Buildings, Scheduled Monuments, Garden & Designed Landscapes, Conservation Areas, Battlefields or World Heritage Sites were identified within 300m of the scheme ([PastMap](#)).

There is one Canmore record located within the scheme extent. Allt Moal Ruainidh is a granite milestone from the 20th century which stands on the northeastern verge of the A82 carriageway and is located at NGR NN 28488 52638 ([Canmore record](#)).

Construction of the A82 carriageway is likely to have removed any archaeological remains that may have been present within the carriageway boundary. The potential for the presence of unknown archaeological remains in the study area has therefore been assessed to be low.

Landscape and visual effects

The scheme is situated within the Ben Nevis and Glen Coe National Scenic Area (NSA). It is not located within a National Park ([SiteLink](#)).

The Landscape Character Type (LCT) within the study area is 'Boggy moorland - Lochaber (no. 232)' ([Scottish Landscape Character Types](#)). The key characteristics of this LCT are:

- Vast waterlogged landscape, although one whose scale can be reduced by low hanging cloud and mist.
- Amphitheatre setting - a massive basin encircled by curtain of hills which are often accentuated by cloud draped summits.
- Large scale recurring landcover pattern of grass, rush and heather, scattered glacial erratics and mounds, pools and lochans with a few stunted trees.
- Lochans with trees and rocks provide local foci within the landscape.
- Small scale pattern of seasonal flowers and lichens draw the eye from the expanse into the detail of the bog surface.
- Minimal obvious human influence, giving a remote and wild landscape character.

Land use ([HLA](#)) within 300m of the scheme extent is unclassified.

The land immediately surrounding the trunk road is classified as 6.3 - Land capable of use as rough grazing with low quality plants. ([Scotland's soils](#)).

The A82 carriageway is a prominent linear landscape feature. The road corridor, for example, has a distinct character shaped by fast-flowing traffic, road markings, safety barriers, signage, landscaping, lighting etc. The scale of the carriageway detracts from the quality and character of the wider landscape.

Biodiversity

Glen Etive and Glen Fyne Special Protection Area (SPA) lies adjacent to the scheme.

Rannoch Moor Special Area of Conservation (SAC) lies adjacent to the scheme.

River Tay SAC lies approximately 2.33km southeast of the scheme at the nearest point.

Rannoch Lochs SPA lies approximately 2.8km southeast of the scheme at the nearest point.

Rannoch Moor Site of Special Scientific Interest (SSSI) lies adjacent to the scheme extent ([SiteLink](#)).

There are no [Local Nature Conservation Sites](#) (LNCS) or Local Nature Reserves (LNRs) within 300m of, or which share connectivity with the scheme extent ([SiteLink](#)).

The NBN Atlas holds multiple records of birds. Under the Wildlife and Countryside Act 1981 (as amended), all wild birds and their active nests are protected, with certain species receiving additional protections.

The NBN Atlas holds the following records of invasive and injurious plants using the above search criteria (within 2km of the scheme):

- Broad-leaved dock (*Rumex obtusifolius*)
- Common ragwort (*Jacobaea vulgaris*)
- Spear thistle (*Cirsium vulgare*)

A search of Transport Scotland's Asset Management Performance System (AMPS) records no invasive or injurious plants within the scheme extent.

There are no areas of woodland listed on the [Ancient Woodland Inventory Scotland](#) within 300m of the scheme extent.

The BEAR Scotland NW Environment Team carried out a survey following good practice guidance on 3rd October 2024. No signs of protected species were recorded during the survey. No invasive non-native species (INNS) of plants were recorded during the survey.

Geology and soils

The A82 within the scheme extents is not located within a [Geological Conservation Review Site](#) (GCRS) or geological SSSI and there are no [Local Geodiversity Sites](#) (LGS) with connectivity to the scheme extents.

The [British Geological Survey](#) online mapping tool records that the bedrock geology within the scheme extents is recorded as:

- Rannoch Moor Pluton – Granodiorite

The mapping tool records the following superficial deposits within the scheme extents:

- Till and morainic deposits (undifferentiated) – diamicton, sand and gravel

Soils within the scheme extent are recorded as being 'Class 1', as displayed on [Scotland's Peat Map](#). Class 1 is considered to be peat soil - nationally important carbon-rich soils, deep peat and priority peatland habitat. Areas likely to be of high conservation value.

Works will be restricted to previously engineered ground within the A82 trunk road boundary. Therefore, this receptor has no constraints that are likely to be impacted by the proposed works and as such, 'geology and soils' is scoped out and is not discussed further within this RoD.

Material assets and waste

The proposed works are necessary to resurface sections of the A82 carriageway, requiring base/binder inlay, and reinstatement of road markings and studs. Materials used will consist of:

- Asphaltic material
- Bituminous emulsion bond coat
- Milled in road studs
- Thermoplastic road marking paint

Wastes are anticipated to be removed planings from the surface course, which will be recovered for re-use in line with BEAR Scotland's Procedure 126: The Production of Fully Recovered Asphalt Road Planings. The Contractor is responsible for the disposal of road planings and this has been registered in accordance with a Paragraph 13(a) waste exemption issued by SEPA, as described in Schedule 3 of the Waste Management Licensing Regulations 2011.

A Site Waste Management Plan (SWMP) is not required for the scheme. Coal tar has not been highlighted as being present within the scheme extent.

Noise and vibration

The works do not fall within a Candidate Noise Management Area (CNMA) as defined by the Transportation Noise Action Plan (Road Maps) ([TNAP](#)).

LDEN or day – evening - night average noise levels are modelled within the scheme extent. Noise levels are recorded as being between 67 and 71db on the road ([Scotland's Noise Scotland's Environment](#)).

Baseline noise and vibration in the study area is mainly influenced by vehicles travelling along the A82 trunk road. Secondary sources are derived from day-to-day urban and agricultural/forestry land management activities

Population and human health

There are no properties located within 300m of the scheme.

There are no access roads, pedestrian paths, street lighting or other non-motorised user facilities located within the scheme extents

There is one layby at the Stob Dearg Viewpoint located on the northern side of the A82 carriageway within the scheme extent.

There are no [National Cycle Network](#) (NCN) routes, core paths ([SE Map](#)), or walking routes, as listed on [WalkHighlands](#), within 300m of the scheme extent.

TM will involve a full road closure with timed amnesties. A diversion via the A85/A828 will also be in place..

The A82 Trunk Road, within the North West, connects Alexandria with Crianlarich, Fort William and Inverness. It commences immediately north of Tullichewan Roundabout in Alexandria leading generally northwards for a distance of 243 kilometres to its junction with the A9 at (but excluding) Longman Roundabout in Inverness. The A82 within the scheme extent is a single carriageway.

Road drainage and the water environment

The A82 within the scheme extents is located along the River Etive (u/s Allt a Chaorainn) (ID: 10316) which crosses the A82 within the scheme extent. It is a river in the River Etive catchment of the Scotland river basin district and has been classified by the Scottish Environment Protection Agency (SEPA) in 2022 under the Water Framework Directive 2000/60/EC (WFD) as having an overall status of 'Good' ([SEPA](#)).

There are numerous other small watercourses crossing the A82 within 300m of the scheme and within the scheme extent.

A search of the [SEPA Flood Map](#) identifies that there is no risk of surface water flooding or river flooding within the scheme extents.

A search of the [Scotland's Environment](#) (SE) online mapping tool determined that the trunk road, within the scheme extents, lies on the 'Upper Glen Coe' groundwater, which has been classified as 'Good'. The scheme falls into a Drinking Water Protected Area for groundwater and surface water.

Climate

The Climate Change (Scotland) Act 2009 sets out the target and vision set by the Scottish Government for tackling and responding to climate change ([The Climate Change \(Scotland\) Act 2009](#)). The Act included a target of reducing CO₂ emissions by 80% before 2050 (from the baseline year 1990). The Climate Change (Emissions Reduction Targets) (Scotland) Act 2019 amended the Climate Change (Scotland) Act 2009 to bring the target of reaching net-zero emissions in Scotland forward to 2045 ([Climate Change \(Emissions Reduction Targets\) \(Scotland\) Act 2019](#)).

The Scottish Government has since published its indicative Nationally Determined Contribution (iNDC) to set out how it will reach net-zero emissions by 2045, working to reduce emissions of all major greenhouse gases by at least 75% by 2030

([Scotland's contribution to the Paris Agreement: indicative Nationally Determined Contribution - gov.scot \(www.gov.scot\)](#)). By 2040, the Scottish Government is committed to reducing emissions by 90%, with the aim of reaching net-zero by 2045 at the latest.

Transport Scotland is committed to reducing carbon across Scotland's transport network and this commitment is being enacted through the Mission Zero for Transport ([Mission Zero for transport | Transport Scotland](#)). Transport is the largest contributor to harmful climate emissions in Scotland. In response to the climate emergency, Transport Scotland are committed to reducing their emissions by 75% by 2030 and to a legally binding target of net-zero by 2045.

Policies and plans

This Record of Determination (RoD) has been undertaken in accordance with all relevant regulations, guidance, policies and plans, notably including the Environment and Sustainability Discipline of the Design Manual for Roads and Bridges ([Design Manual for Roads and Bridges \(DMRB\)](#)) and Transport Scotland's Environmental Impact Assessment Guidance ([Guidance - Environmental Impact Assessments for road projects \(transport.gov.scot\)](#)).

Description of main environmental impacts and proposed mitigation

Air quality

Construction activities associated with the proposed works have the potential to temporarily cause local air quality impacts. Activities undertaken on site may cause dust and particulate matter to be emitted to the atmosphere. However, taking into account the nature and scale of the works and the following mitigation measures, the risk of significant impacts to air are considered to be low.

- When not in use, plant and vehicles will be switched off; there will be no idling vehicles.
- All plant, machinery and vehicles associated with the works will be maintained in order to minimise emissions, as per manufacturing and legal requirements. No significant dust, particulate matter, and exhaust emissions sources will be introduced by the works.
- Green driving techniques will be adopted, and effective route preparation and planning to be undertaken prior to works.
- All delivery vehicles carrying material with dust potential will be covered when travelling to or leaving site, preventing the spread of dust beyond the work area.
- Activities involving cutting/planing will be appropriately managed to reduce the potential for dust creation. This will involve use of measures such as dampening down or on tool extraction where required.
- Material stockpiles will be reduced as far as is reasonably practicable by using a 'just in time' delivery system. All material will also be stored on made ground.
- Any stockpiled material on site will be monitored daily to ensure no risks of dust emissions exists.
- Materials will be removed from site as soon as is practicable.
- Good housekeeping will be employed throughout the work.
- Drop heights to haulage vehicles and onto conveyors will be minimised.
- Surfaces will be swept where loose material remains following planing.

With the above mitigation measures in place, it is anticipated that any air quality effects associated with the proposed works are unlikely to be significant. This receptor is not considered further in this RoD.

Cultural heritage

All work is restricted to the already engineered carriageway boundary, and as such the potential for exposure of undiscovered cultural heritage features is considered negligible; construction of the A82 road corridor is likely to have removed any archaeological remains that may have been present.

As standard, the following good practice measures will be in place to reduce the risk of impacts to undiscovered features of cultural heritage interest:

- There will be no storage of vehicles, plant, or materials against any buildings, walls or fences.
- Should any unexpected archaeological evidence be discovered, works will stop temporarily in the vicinity and the BEAR Scotland Environment Team contacted for advice.
- People, plant, and materials will, as much as is reasonably practicable, only be present on areas of made / engineered ground. Where access out with these areas is required for the safe and effective completion of the scheme, it will be reduced as much as is reasonably practicable and ideally be limited to access on foot.

With the above mitigation measures in place, it is anticipated that any cultural heritage effects associated with the proposed works are unlikely to be significant. This receptor is not considered further in this RoD.

Landscape and visual effects

The works lie within the boundary of the Ben Nevis and Glen Coe NSA. Due to the nature of resurfacing works being restricted to the trunk road boundary, no permanent visual impact on the NSA is expected.

There will be a short-term impact on the landscape character and visual amenity of the site as a result of the presence of construction plant, vehicles, and TM. However, works will be restricted to the A82 carriageway boundary and will be limited to the like-for-like replacement of the carriageway surface and will be carried out over a short duration (8 nights).

Land use will not change as a result of the works, and the works will not result in any residual change to the visual amenity of the local landscape.

In addition, the following mitigation measures will be put in place during works:

- Throughout all stages of the works, the site will be kept clean and tidy, with materials, equipment, plant and wastes appropriately stored, reducing the landscape and visual effects as much as possible.
- Works will avoid encroaching on land and areas where work is not required or is not permitted. This includes general works, storage of equipment/containers and parking.
- Where applicable, upon completion of the works, any damage to the local landscape shall be reinstated as much as is practicable.
- The site will be left clean and tidy following construction.

With the above mitigation measures in place, it is anticipated that any landscape and visual effects associated with the proposed works are unlikely to be significant. This receptor is not considered further in this RoD.

Biodiversity

During road resurfacing, activities undertaken on site could potentially have a temporary adverse impact on biodiversity in the area as a result of an increased vehicle presence and the potential for disturbance to protected species and pollution of habitats.

Due to the proximity of works to several European Sites, BEAR Scotland produced a Habitats Regulations Appraisal (HRA) to assess potential effects of the proposed resurfacing works on these sites. The HRA concluded that works would not result in any Likely Significant Effects (LSE) on the qualifying features of the River Tay SAC, Rannoch Lochs SPA, and Rannoch Moor SAC due to the distance of works from the sites, lack of in-stream works, and implementation of good practice measures to prevent pollution. However, LSE could not be ruled out for species within Rannoch Moor SAC or Glen Etive and Glen Fyne SPA, and an Appropriate Assessment was carried out. No Adverse Effects on Site Integrity (AESI) were identified.

All works will be restricted to the A82 carriageway surface and will not entail any in-stream works or vegetation clearance. There are no significant earthworks associated with the scheme, and the scheme does not require permanent (or temporary) land-take, accommodation works, site clearance or locally gained resources, and there is no requirement to import topsoil. As such, there is limited potential to spread or introduce invasive non-native species (INNS), invasive native perennials, or injurious flowering plant species.

Activities undertaken on site could potentially have a temporary adverse impact on biodiversity in the area as a result of an increased vehicle presence and the potential for disturbance to protected species and pollution of habitats. However, works are restricted to the A82 carriageway and the number of construction vehicles and construction operatives required onsite is low given the scale and scope of works. In

addition, any species in the area are likely to be accustomed to noise and visual disturbance pertaining to vehicle movements on the A82. The scheme is of short duration (8 nights) and will be undertaken on a rolling programme. The potential for significant species disturbance within the area of likely construction disturbance is therefore considered to be low.

Pollution controls and good practice measures to reduce impacts of works on the local environment will be detailed in the Site Environmental Management Plan (SEMP) and adhered to on site. Therefore, with the following mitigation measures in place, the risk of significant impacts on biodiversity are considered to be low:

- Works will be strictly limited to areas required for access and resurfacing works. Unnecessary encroachment onto terrestrial or aquatic areas will not be tolerated.
- Site personnel will remain vigilant for the presence of potentially unrecorded instances of INNS or injurious weeds in road verges throughout the works period. Should any INNS be identified in working areas, no works will take place within 7m of these areas until the BEAR Scotland Environment Team can provide further advice on additional mitigation measures.
- Site personnel will remain vigilant for the presence of any protected species throughout the works period. Should a protected species be noted during construction, works will temporarily halt until the species has sufficiently moved on. Any sightings of protected species shall be reported to the BEAR Scotland Environment Team.
- A 'soft start' will be implemented on site each day. This will involve switching on vehicles and checking under/around vehicles and the immediate work area for mammals prior to works commencing to ensure none are present and that there is a gradual increase in noise.
- Relevant toolbox talks for working with protected species will be included in the SEMP.
- Any excavations, exposed pipes/drains, or areas where an animal could become trapped (e.g., storage containers) will be covered over when not in use, at the end of each shift, and following completion of the works to avoid animals falling in and becoming trapped.
- Any artificial lighting used during night works or periods of low light levels will be directional and will avoid spilling into sensitive areas and nearby habitat where possible.
- If fencing is utilised at any point during the works, a gap of 200mm from ground level will be provided, allowing free passage for mammals and preventing entrapment.

With the above mitigation measures in place, it is anticipated that any biodiversity effects associated with the proposed works are unlikely to be significant. This receptor is not considered further in this RoD.

Material assets and waste

There is potential for impacts as a result of resource depletion through use and transportation of new materials. However, materials will be sourced locally where possible and the following mitigation measures will be put in place:

- Materials will be sourced from recycled origins as far as reasonably practicable within design specifications.
- Care will be taken to order the correct quantity of required materials to prevent the disposal of unused materials.
- Where possible, minimal packaging will be requested on required deliveries to reduce unnecessary waste and production of packaging materials.

There is potential for impacts during works as a result of the improper storage or disposal of waste. The following mitigation measures will be put in place:

- The waste hierarchy (Reduce, Reuse, Recycle and Dispose) will be employed throughout the construction works.
- The subcontractor will adhere to waste management legislation and ensure they comply with their Duty of Care.
- Containment measures will be in place to prevent debris or pollutants from entering the surrounding environment.
- Planings will be re-used or recycled under a SEPA Paragraph 13(a) waste exemption and in line with BEAR Scotland's procedure 126: The Production of Fully Recovered Asphalt Road Planings.
- All wastes and unused materials will be removed from site in a safe and legal manner by a licensed waste carrier upon completion of the works. The appointed waste carrier will have a valid SEPA waste carrier registration, a copy of which will be provided to and retained by BEAR Scotland as early as possible.
- All appropriate waste documentation will be present on site and will be available for inspection. A copy of the Duty of Care paperwork must be provided and filed appropriately in accordance with the Code of Practice (as made under Section 34 of Environmental Protection Act 1990 as amended).
- Re-use and recycling of waste will be encouraged and undertaken where possible, and the subcontractor will be required to fully outline their plans and

provide documentary evidence for waste arising from the works (e.g., waste carrier's licence, transfer notes, and waste exemption certificates).

- Staff will be informed that littering will not be tolerated. Staff will be encouraged to collect any litter seen on site.

With the above mitigation measures in place, it is anticipated that any material assets and waste effects associated with the proposed works are unlikely to be significant. This receptor is not considered further in this RoD.

Noise and vibration

Construction activities associated with the proposed works have the potential to cause noise and vibration impacts through the use of equipment and construction vehicles for the proposed activities. The works will employ a night-time working pattern; however, no residential properties or other sensitive receptors are located within 300m of the works. Due to the short duration and localised nature of the works, the proposed scheme is anticipated to result in temporary minor noise impacts during the construction programme. The following mitigation measures will be put in place:

- The Best Practicable Means, as defined in Section 72 of the Control of Pollution Act 1974, will be employed at all times to reduce noise to a minimum.
- The Environmental Health Officer (EHO) for the Highland Council will be notified of works.
- On-site construction tasks will be programmed to be as efficient as possible, with a view to limiting noise disruption to the local area.
- All site personnel will be fully briefed in advance of works regarding the need to minimise noise during works and of the site-specific sensitivities.
- All plant will be operated in such a way that minimises noise emissions and will have been maintained regularly to the appropriate standards.
- Where fitted, and where permitted under Health and Safety requirements, white noise reversing alarms will be utilised during construction.
- Where ancillary plant such as generators are required, they will be positioned so as to cause minimum noise disturbance. Where deemed necessary, acoustic screens will be utilised.

With the above mitigation measures in place, it is anticipated that any noise and vibration effects associated with the proposed works are unlikely to be significant. This receptor is not considered further in this RoD.

Population and human health

During construction, activities undertaken on site may have temporary adverse impacts on vehicle travellers, and non-motorised road users (NMUs) as a result of construction presence, and associated noise and delays due to traffic management measures. Road users and local bus operators will be informed of works through a media release, which will provide details of construction dates and times, planned amnesties, and the alternative diversion route.

No significant congestion issues are noted during the proposed construction hours; however increased journey times may occur, but these are considered insignificant considering the relatively low traffic counts.

With the following mitigation measures in place, the risk of significant impacts on population and human health is considered to be low:

- Notification will be issued to local public transport operators prior to commencement of the works, advising of any proposed works and expected restrictions.
- Local access will be granted as required.
- Any changes of schedule (e.g. change from night-time works to daytime works) will be communicated to travelling public throughout the programme.
- Appropriate provisions / measures will be implemented within the TM to allow the safe passage of NMUs of all abilities through the site (if required).
- Journey planning information will be available for drivers online at the trafficscotland.org website. Journey planning information will also be available for drivers online through BEAR's social media platforms.

With the above mitigation measures in place, it is anticipated that any population and human health effects associated with the proposed works are unlikely to be significant. This receptor is not considered further in this RoD.

Road drainage and the water environment

During resurfacing works, there is potential for temporary impacts on the water environment. Potential changes in water quality from pollution events (either by accidental spillage of sediments, particulate matter, chemicals, fuels or by mobilisation of these in surface water caused by rain/flooding) during works have the potential to have a direct or indirect effect on the surrounding waterbodies. The following mitigation measures will be put in place to reduce the risk of pollution incidents as a result of works:

- The scheme will not entail any in-stream works.

- Standard working practices to comply with The Water Environment (Controlled Activities) (Scotland) Regulations 2011 (as amended) for works in or near water are detailed in the SEMP and will be adhered to on site.
- No discharges into any watercourses or drainage systems are permitted. Appropriate containment measures will be in place to prevent any loss of construction materials into the water environment.
- Appropriate measures will be implemented during resurfacing operations to limit the potential for wastes (i.e. road planings) and materials (i.e. new asphalt) to enter any gullies present on site. On completion of resurfacing operations, any gullies present on site should be visually checked to ensure they have not become blocked as a result of the scheme.
- An incident response (contingency) plan will be put in place to reduce the risk from pollution incidents or accidental spillages. All necessary containment equipment, including suitable spill kits (for oil and chemicals) will be available on site, quickly accessible if needed, and staff trained in their use.
- All spills will be logged and reported. In the event of any spills into the water environment, all works will stop, and the incident will be reported to the project manager and the BEAR Scotland Environmental Team. SEPA will be informed of any such incident as soon as possible using the SEPA Pollution Hotline.
- All plant and equipment will be regularly inspected for any signs of damage and leaks. A checklist will be present to make sure that the checks have been carried out.
- Storage of hazardous material, oil and fuel containers will be distanced more than 10m away from any watercourses.
- If required, a designated refuelling area will be identified. Fuel bowsers will be stored on an impermeable area and will be fully bunded. This will be distanced more than 10m from any watercourses.
- During refuelling of smaller mobile plant, a funnel will be used, and drip trays will be in place. Care will be taken to reduce the chance of spillages. Spill kits will be quickly accessible to capture any spills should they occur. The ground / stone around the site of a spill will be removed, double bagged and taken off site as special contaminated waste.
- Generators and static plant may have the potential to leak fuel and / or other hydrocarbons and will have bunding with a capacity of 110%. If these are not bunded then drip trays must also be supplied beneath the equipment with a capacity of 110%.

With the above mitigation measures in place, it is anticipated that any road drainage and the water environment effects associated with the proposed works are unlikely to be significant. This receptor is not considered further in this RoD.

Climate

Construction activities associated with the proposed scheme works have the potential to cause local air quality impacts as a result of the emission of greenhouse gases through the use of vehicles and machinery, material use and production, and transportation of materials to and from site. The following mitigation measures will be put in place:

- BEAR Scotland will adhere to their Carbon Management Policy.
- Local contractors and suppliers will be used as far as practicable to reduce fuel use and greenhouse gas emitted as part of the works.
- Where possible, materials will be sourced locally to reduce greenhouse gas emissions associated with materials movement, and waste will be removed to a local waste management facility.

With the above mitigation measures in place, it is anticipated that any climate effects associated with the proposed works are unlikely to be significant. This receptor is not considered further in this RoD.

Vulnerability of the project to risks

Works are restricted to the made ground of the A82 carriageway and TM will be designed in line with existing guidance. TM will consist of nightshift lane closures with amnesties. A diversion via the A85/A828 will also be available. Where required, alternative NMU provisions/routes will be included in the TM setup, to minimise impact of the works on NMUs.

A Traffic Management Plan (TMP), which includes measures to avoid or reduce disruption to road traffic, will be produced in accordance with the Traffic Signs Manual (Department of Transport 2009). The TMP will ensure that there is no severance of community assets, access routes or residential development.

These measures, along with mitigation measures and standard working practices, will be detailed in the SEMP and adhered to on site. The vulnerability of the project to risks of major accidents and disasters is considered to be low.

Assessment cumulative effects

The proposed works are not anticipated to result in significant environmental effects. Due to the nature of the proposed works, no cumulative effects are anticipated with any other developments in the vicinity.

A search of the Highland Council Planning Portal ([Highland Council Planning Portal](#)) identified no approved planning applications within 300m of the scheme in the last 6 months.

A search of the Scottish Roads Works Commissioner website ([Map Search](#)) has identified that no other roadworks are currently ongoing, or noted as being planned, on the trunk road at the same time as this scheme. Due to the nature of the proposed works, no cumulative effects are anticipated with any other developments in the vicinity.

BEAR Scotland programme all of their proposed works in line with appropriate guidance and contractual requirements. All schemes are programmed to take into account existing and future planned works, with a view of limiting any cumulative effects relating to TM. As a result of this exercise, where a potential for cumulative impacts is identified, BEAR will reprogramme schemes to avoid / limit any cumulative effects or will utilise existing TM to complete multiple schemes at once. This approach allows BEAR Scotland to effectively manage the potential cumulative effects as a result of TM, resulting in minimal disruption to users of the Scottish trunk road network.

Overall, it is unlikely that the proposed works will have a significant cumulative effect with any other future works in the area.

Assessments of the environmental effects

As detailed in the Description of Main Environmental Impacts and Proposed Mitigation section within this Record of Determination, there are no significant effects anticipated on any environmental receptors as a result of the proposed works.

Due to the proximity of works to several European Sites, an HRA was undertaken to assess potential effects of the proposed resurfacing works on these sites. An Appropriate Assessment was carried out which concluded no AESI as a result of works.

Statement of case in support of a Determination that a statutory EIA is not required

This is a relevant project in terms of section 55A(16) of the Roads (Scotland) Act 1984 as it is a project for the improvement of a road and the completed works (together with any area occupied by apparatus, equipment, machinery, materials, plant, spoil heaps, or other such facilities or stores required during the period of construction) is situated wholly within Ben Nevis and Glen Coe NSA, which is a sensitive area within the meaning of regulation 2(1) of the Environmental Impact Assessment (Scotland) Regulations 1999.

The project has been subject to screening using the Annex III criteria to determine whether a formal EIA is required under the Roads (Scotland) Act 1984 (as amended by The Roads (Scotland) Act 1984 (Environmental Impact Assessment) Regulations 2017). Screening using Annex III criteria, reference to consultations undertaken, and review of available information has not identified the need for a statutory EIA.

The project will not have significant effects on the environment by virtue of factors such as:

Characteristics of the scheme:

- Works are restricted to like-for-like replacement of worn road surface, with all works restricted to made ground on the A82 carriageway surface.
- Construction activities are restricted to an area of 0.67 ha along a 1,100m stretch of the A82.
- The works will be temporary, transient, localised, and completed during night-time hours on a rolling programme.
- Works are not expected to result in significant disturbance to protected species that may be present in the wider area.

- The risk of major accidents or disasters is considered to be low.
- Removing the carriageway defects will provide this part of the A82 carriageway with another life cycle, and significantly improve the ride quality, which will result in safer conditions for road users.

Location of the scheme:

- The scheme is located wholly within Ben Nevis and Glen Coe NSA; however, no permanent visual impacts on the NSA or local landscape will result from the works. Temporary visual impacts during construction will be minor, highly localised, and of short duration.
- The scheme will be located within the existing A82 road boundary and as such, no land take will be required.
- The HRA did not identify any LSE on the qualifying features of River Tay SAC, Rannoch Lochs SPA, or Rannoch Moor SAC as a result of works. No AESI was identified within Rannoch Moor SAC or Glen Etive and Glen Fyne SPA as a result of works.
- No residential properties or other sensitive receptors lie within 300m of the scheme.

Characteristics of potential impacts of the scheme:

- Any potential impacts of the works are expected to be temporary, short-term, non-significant, and limited to the construction phase.
- Measures will be in place to ensure appropriate removal and disposal of waste.
- No impacts on the environment are expected during the operational phase as a result of works. The works are expected to result in positive impacts on road users, ecological and human receptors during the operational phase.
- As the works will be limited to the like-for-like replacement there is no change to the vulnerability of the road to the risk or severity of major accidents/disasters that would impact on the environment.
- Mitigation measures detailed above (and in the SEMP) will be put in place with the objective to prevent and, if required, subsequently control any potential impacts on sensitive receptors.

Annex A

“sensitive area” means any of the following:

- land notified under sections 3(1) or 5(1) (sites of special scientific interest) of the Nature Conservation (Scotland) Act 2004
- land in respect of which an order has been made under section 23 (nature conservation orders) of the Nature Conservation (Scotland) Act 2004
- a European site within the meaning of regulation 10 of the Conservation (Natural Habitats, &c.) Regulations 1994
- a property appearing in the World Heritage List kept under article 11(2) of the 1972 UNESCO Convention for the Protection of the World Cultural and Natural Heritage
- a scheduled monument within the meaning of the Ancient Monuments and Archaeological Areas Act 1979
- a National Scenic Area as designated by a direction made by the Scottish Ministers under section 263A of the Town and Country Planning (Scotland) Act 1997
- an area designated as a National Park by a designation order made by the Scottish Ministers under section 6(1) of the National Parks (Scotland) Act 2000.



**TRANSPORT
SCOTLAND**

CÒMHDHAIL ALBA

© Crown copyright 2024

You may re-use this information (excluding logos and images) free of charge in any format or medium, under the terms of the Open Government Licence. To view this licence, visit <http://www.nationalarchives.gov.uk/doc/open-government-licence> or e-mail: psi@nationalarchives.gsi.gov.uk

Where we have identified any third party copyright information you will need to obtain permission from the copyright holders concerned.

Further copies of this document are available, on request, in audio and visual formats and in community languages. Any enquiries regarding this document / publication should be sent to us at info@transport.gov.scot

This document is also available on the Transport Scotland website: www.transport.gov.scot

Published by Transport Scotland, October 2024

Follow us:



transport.gov.scot



**Scottish Government
Riaghaltas na h-Alba
gov.scot**